


fan type infrared panel

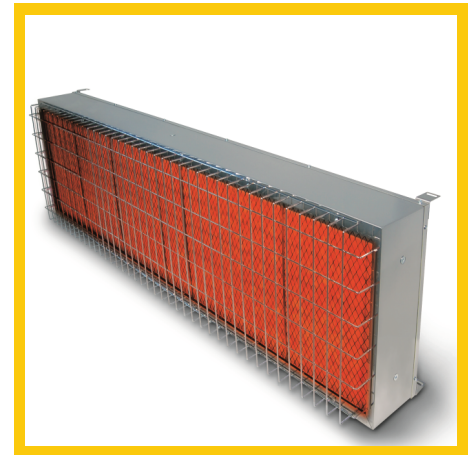

PANEL CODE	DIMENSIONS OF PANEL (MM)			WEIGHT (KG)	HEATING POWER (KW / HOUR)		HEATING POWER (KCAL / HOUR)		PANEL PRE-HEATING TYPE	GAS CONSUMPTION	
	WIDTH	HEIGHT	THICKNESS		MAX	MIN	MAX	MIN		NATURAL GAS (M ³ / HOUR)	LPG GAS (KG / HOUR)
10 K	621	634	230	27	10.0	6.0	8.600	5.160	0,76 KW	1,00	0,75
15 K	485	1.232	230	32	15.0	9.0	12.900	7.740	0,83 KW	1,50	1,13
20 K	485	1.542	230	39	20.0	12.0	17.200	10.320	1,1 KW	2,00	1,50
25 K	485	1.845	230	45	25.0	15.0	21.500	12.900	1,2 KW	2,50	1,88

Gas-type infrared heaters do not require air for heating or air for heat conduction, as in conventional systems.

It heats the paint or coating on the surface of the product directly applied. For this reason, it performs infrared heating in the short heating zone. Since the infrared heater does not heat the entire mass, it provides more economical heating