


without fan type infrared panel

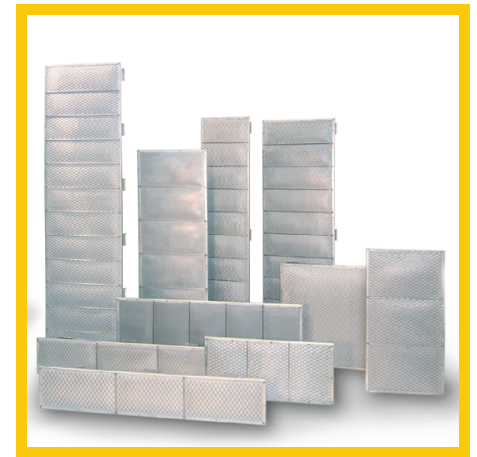

PANEL CODE	DIMENSIONS OF PANEL (MM)			WEIGHT (KG)	HEATING POWER (KW / HOUR)		HEATING POWER (KCAL / HOUR)		PANEL PRE HEATING TYPE	GAS CONSUMPTION	
	WIDTH	WEIGHT (KG)	THICKNESS		MAX	MIN	MAX	MIN		NATURAL GAS (M ³ / HOUR)	LPG GAS (KG / HOUR)
8.40	206	1.006	45	5	4,0	2,5	3.440	2.065	0,50 KW	0,40	0,30
8.51	206	1.306	45	8	5,5	3,5	4.730	2.840	0,80 KW	0,50	0,40
15.30	379	760	45	8	5,0	3,0	4.475	2.670	0,58 KW	0,50	0,38
16.40	410	1.022	45	11	8,0	5,0	6.880	4.130	0,67 KW	0,80	0,60
16.51	410	1.306	45	13	10,5	6,5	9.030	5.420	0,85 KW	1,00	0,80
18.48	460	1.220	60	15	10,0	6,0	8.600	5.160	0,82 KW	1,00	0,75
18.60	460	1.530	60	19	12,0	7,0	10.320	6.195	1,02 KW	1,20	0,90
18.72	460	1.830	60	29	15,0	9,0	12.900	7.740	1,21 KW	1,50	1,13
24.24	610	610	60	10	6,0	3,5	5.160	3.100	0,76 KW	0,60	0,45

Gas type infrared heaters do not require air for heating or air for heat conduction, as in conventional systems. It heats the paint or coating on the surface of the product directly applied.

For this reason, it performs infrared heating in the short heating zone.

Since the infrared heater does not heat the entire mass, it provides more economical heating.